


**TRSA200
Single Stage
Liquid Ring Compressor**



200 Newsome Drive
Yorktown, VA 23693
1-800-535-4243
www.Travaini.com

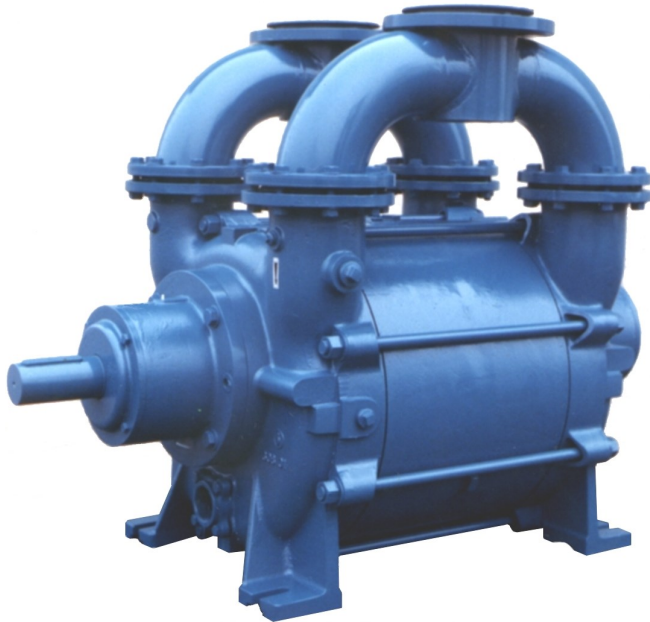

Pressure Range	4-20 PSig
Capacity	800 to 2150 CFM
Features	Single stage vacuum pump with external sealed bearings
Shaft Sealing Options	Mechanical seals (Double mechanical seals or stuffing box optional)
Options	Bareshaft pump Coupled to electric motor V-Belt driven
Optional Accessories	Available as a component in larger assembly

Technical Data

PUMP TYPE		TRSA200-1950			TRSA200-2500			TRSA200-3100
Speed	RPM	980	880	740	980	880	740	880
Motor - installed power	HP	250	200	150	300	250	200	150
Average service liquid flow	GPM	45	45	45	50	50	50	45
Noise level at 150 Torr	dB(A)							
Maximum Pressure	PSig	20	20	20	20	20	20	10

Standard Materials of Construction**

Part No.	Description	F	RX	RA	A3
106	Suction casing	Cast iron			Stainless steel AISI 316
107	Discharge casing				
110	Impeller housing				
210	Shaft	Stainless steel AISI 420	Stainless steel AISI 316		
357	Bearing housing	Cast iron			
230	Impeller	Ductile iron	Stainless steel AISI 304	Stainless steel AISI 316	

Model Designation

TRSA200-3100/C/RA	
T	Travaini manufacturer
R	Liquid ring pump
S	Single stage pump
A	Design revision
200	Flange size (mm)
3100	Nominal capacity (m ³ /hr)*
C	Shaft sealing: C = Mechanical seal C2=Double mechanical seal B = Packing seal
RA	Materials of construction (see table)

*Applies to vacuum systems

**Special materials available upon request

-Request for information on our WATERSEAL and DYNASEAL engineered vacuum systems

-For further information please consult Travaini Pumps USA.

REF:	JGJ/	Date	4/23/2015	Nº:	101005.000
------	------	------	-----------	-----	------------