


Performance Curves

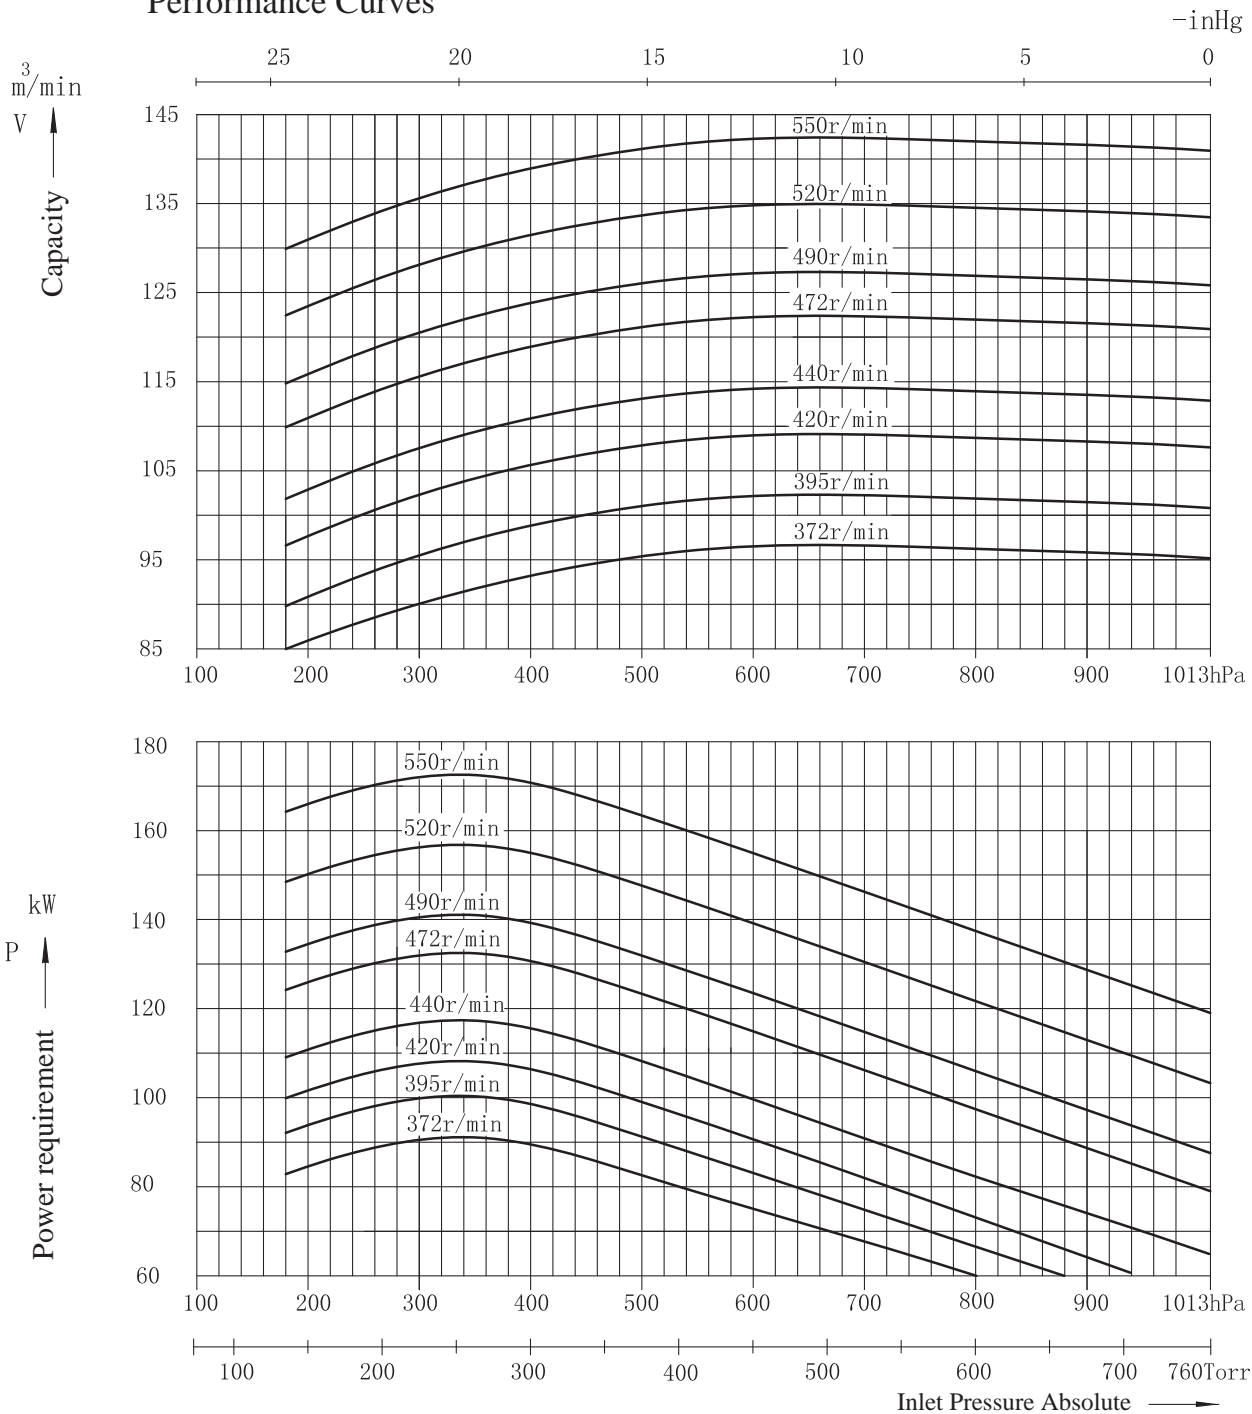

Notes:

1. These performance curves are based on operating conditions with saturated air at a temperature of 68° F(20° C), operating water at a temperature of 60° F(15° C), and discharge pressure of 1013hPa.
2. The tolerance about Capacity and Power requirement should be in range of 5% for inlet pressure ≥ 200 hPa.

Speed (r/min)	Liquid supply		
	200~400mbar (m ³ /h)	400~600mbar (m ³ /h)	>600mbar (m ³ /h)
372	8.0~10.0	6.0~8.0	4.0~6.0
395	8.5~10.6	6.4~8.5	4.3~6.4
420	9.0~11.3	6.8~9.0	4.6~6.8
440	9.4~11.8	7.1~9.4	4.8~7.1
472	9.8~12.7	7.6~9.8	5.2~7.6
495	10.3~13.3	8.0~10.3	5.5~8.0
520	10.8~14.0	8.4~10.8	5.8~8.4
550	11.4~14.8	8.9~11.4	6.1~8.9